


CTC COIL TECHNOLOGY CORPORATION

DC/DC CONVERTER MDV-XXXX/H SERIES 1W SINGLE OUTPUT

ELECTRICAL SPECIFICATIONS: UNREGULATED

- Input voltage range ----- $\pm 10\%$
- Input filter----- Capacitor.
- Output voltage accuracy ----- $\pm 5\%$
- Line voltage regulation ----- 1.2%Typ./1%Of Vin
- Load voltage regulation (10% ~ 100%)-
5V Output Types----- 15% Max
9V,12V and 15V Output Types----- 10% Max
- Ripple&noise/20MHZ BW ----- 100mV P-P Max.
- Efficiency at full load----- 70% Min
- Isolation voltage ----- 4000 Vdc Min
- Short circuit protection ----- 1.0 Second
- Operating temperature range ----- -40°C to 85°C
- Storage temperature range ----- -55°C to 125°C
- Meet CE EN-60950-1 Certified、 CE
EN-60601-1 Certified

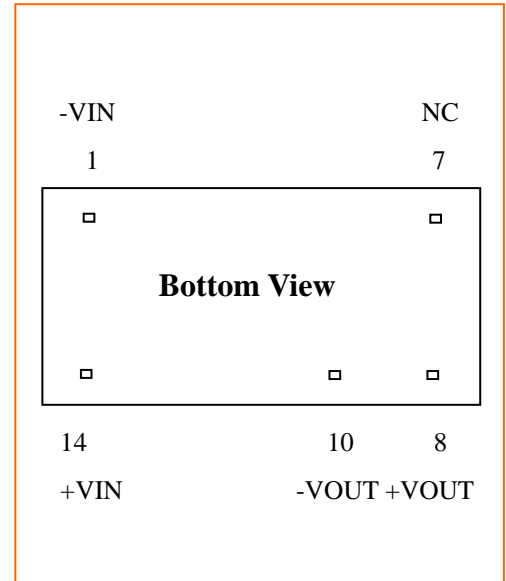


*Note: Measured @ 25 With The Condition of Vin = Nominal And Full Load.





Selection Guide

Model Number	Input Voltage (VDC)	Output Voltage (VDC)	Output Current (mA)	Efficiency (%)
MDV-XX1.8/H	1.8,3.3,5,9,12,15,24	1.8	555	70
MDV-XX3.3/H	1.8,3.3,5,9,12,15,24	3.3	300	70
MDV-XX05/H	1.8,3.3,5,9,12,15,24	5	200	70
MDV-XX09/H	1.8,3.3,5,9,12,15,24	9	111	75
MDV-XX12/H	1.8,3.3,5,9,12,15,24	12	84	78
MDV-XX15/H	1.8,3.3,5,9,12,15,24	15	66	80
MDV-XX24/H	1.8,3.3,5,9,12,15,24	24	42	80

Package Style And Pinning (mm)

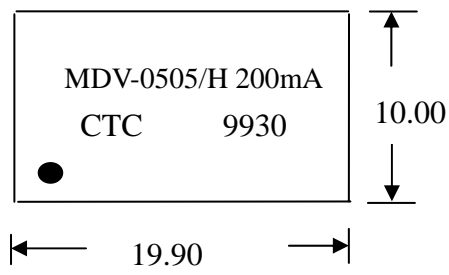

Top View



PIN	FUNCTION
1	-VIN
7	NC
8	+VOUT
10	-VOUT
14	+VIN

*Note : Terminal ----- 0.51 X 0.25 Flat Pin
TOL. : ± 0.25 mm
UNIT : mm